





Remove side cover with 9/64 hex wrench




Insert plug, make sure it is in all of the way.

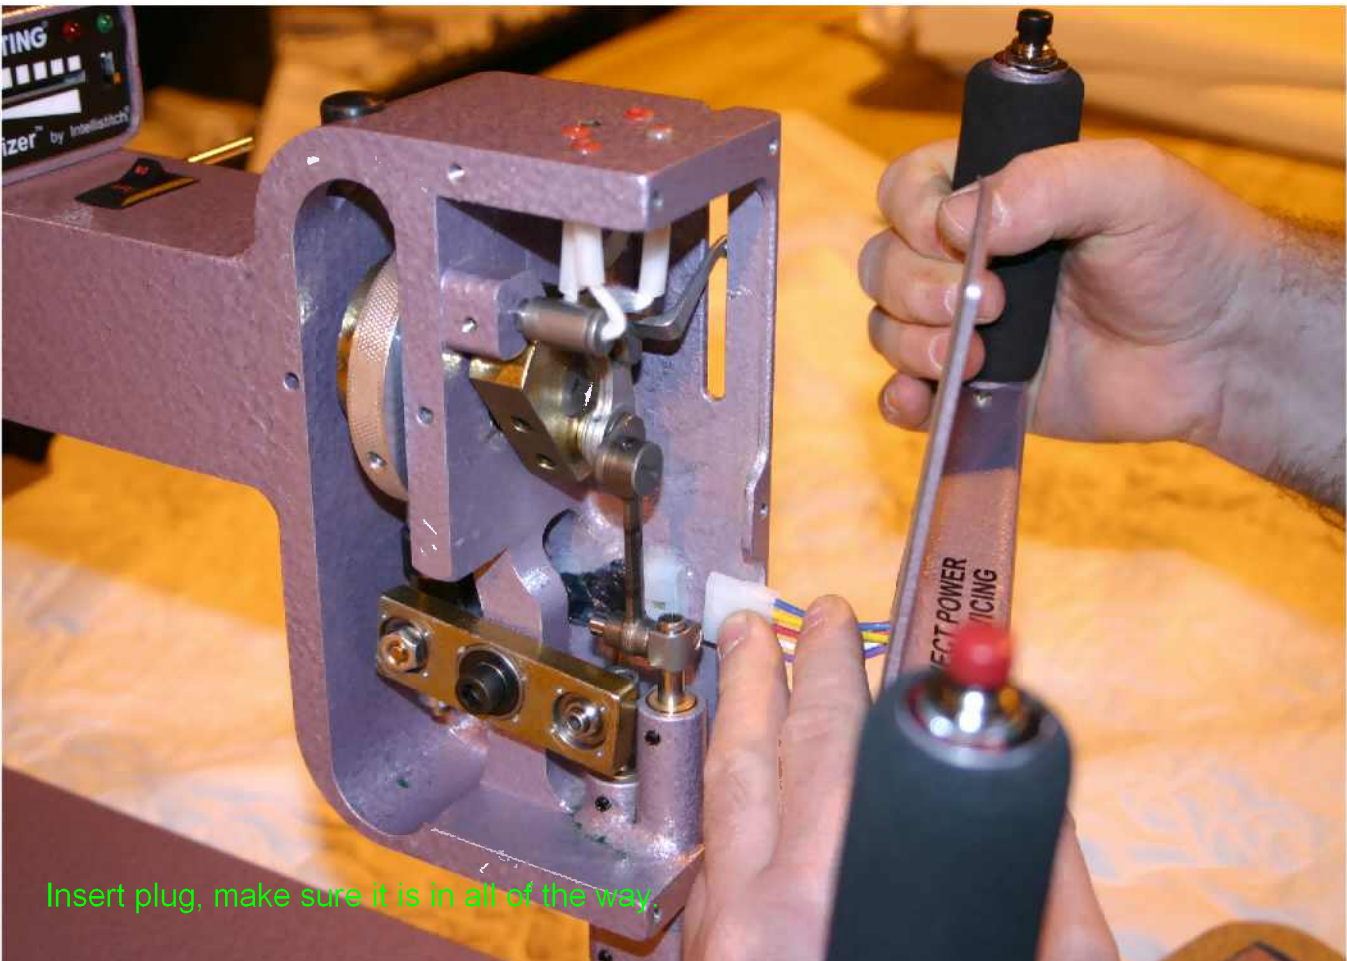


Attach front handles with five screws

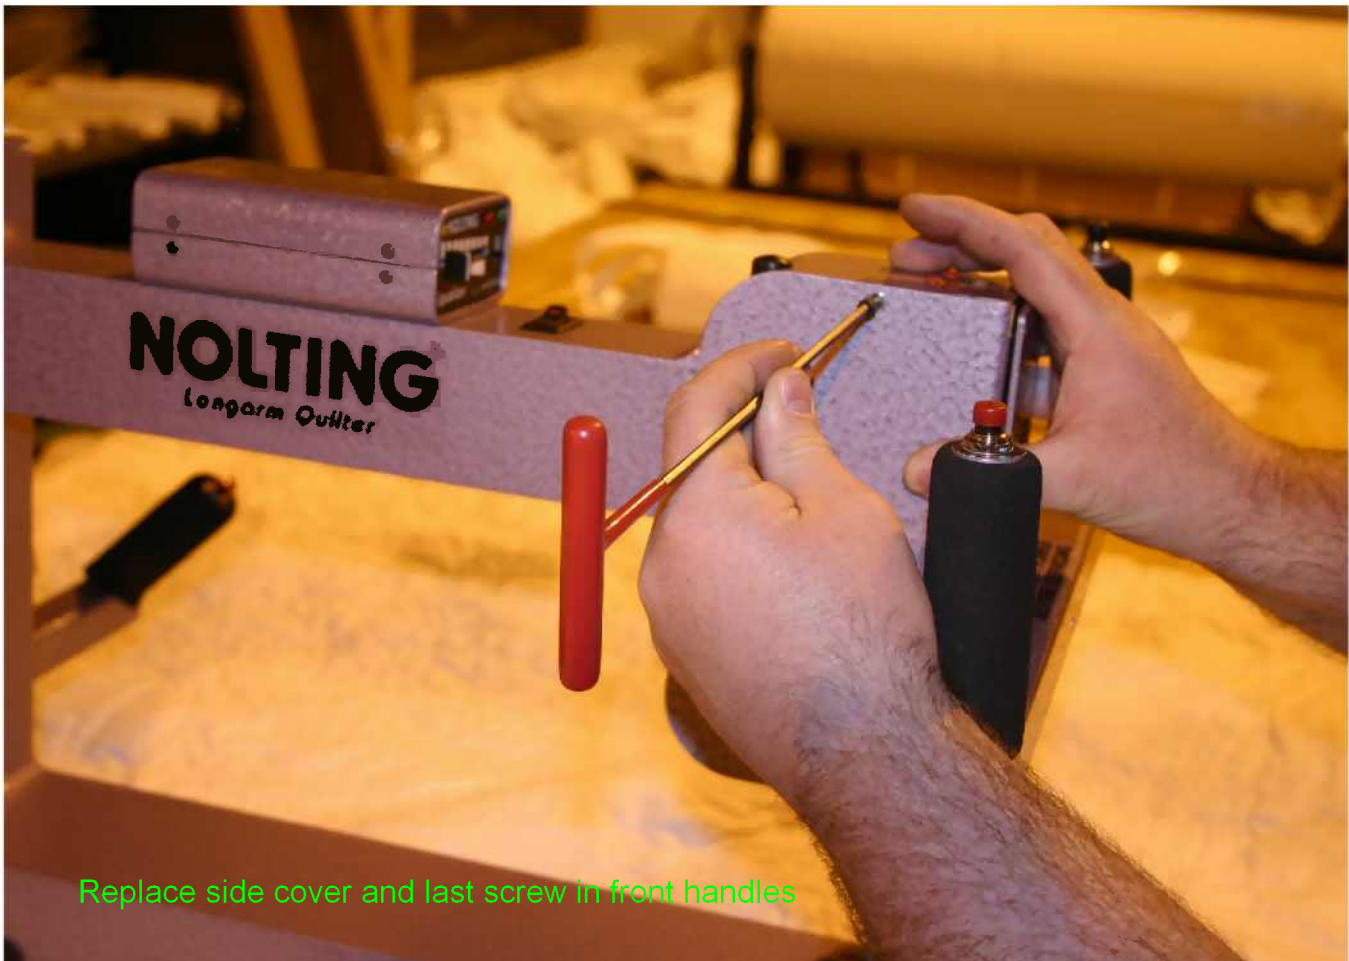


Replace side cover and last screw in front handles

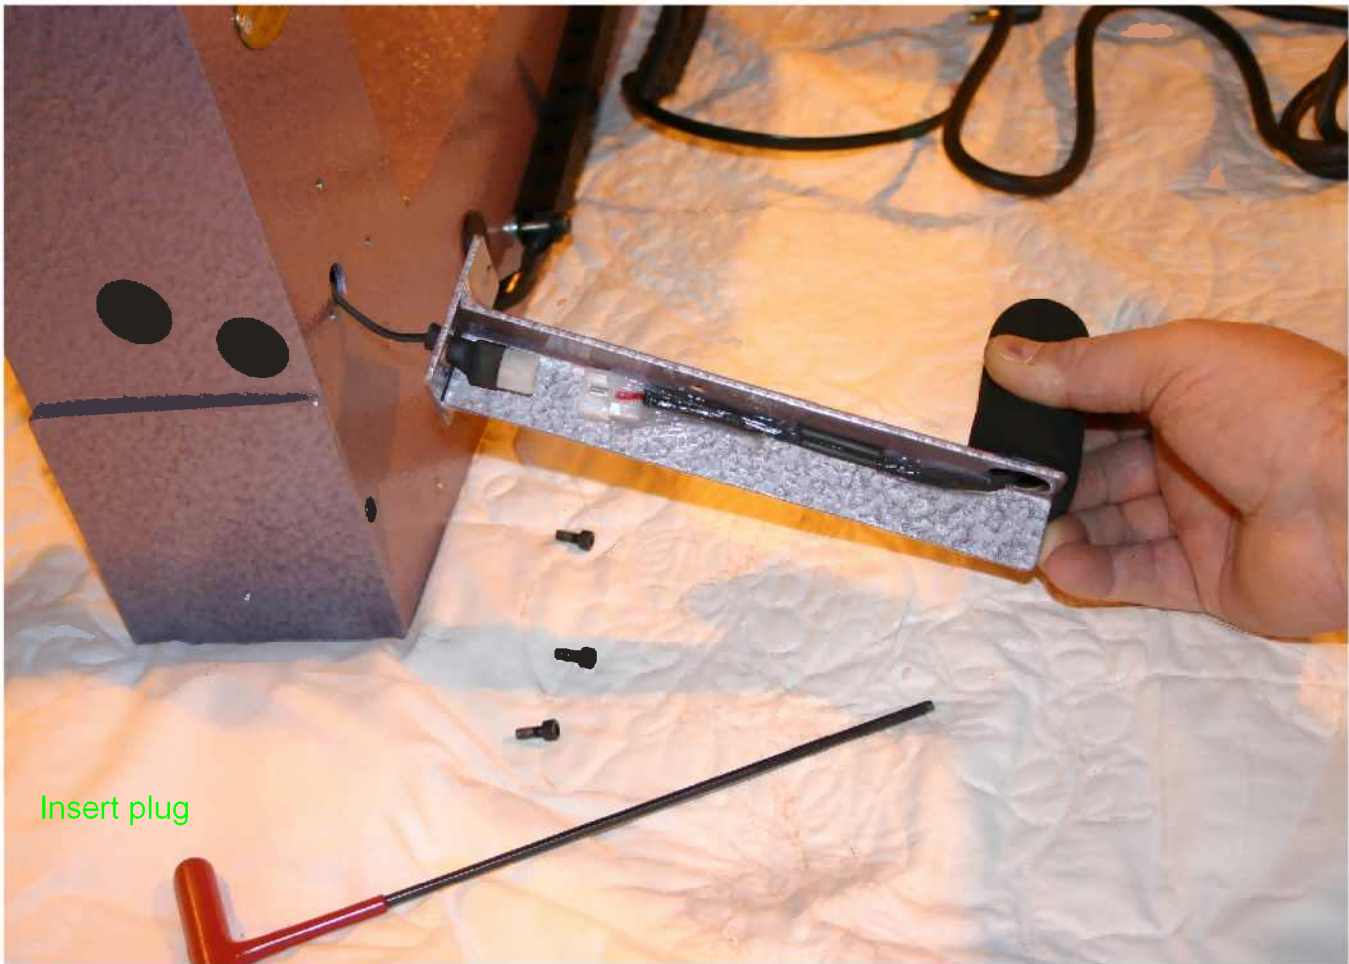


Insert plug

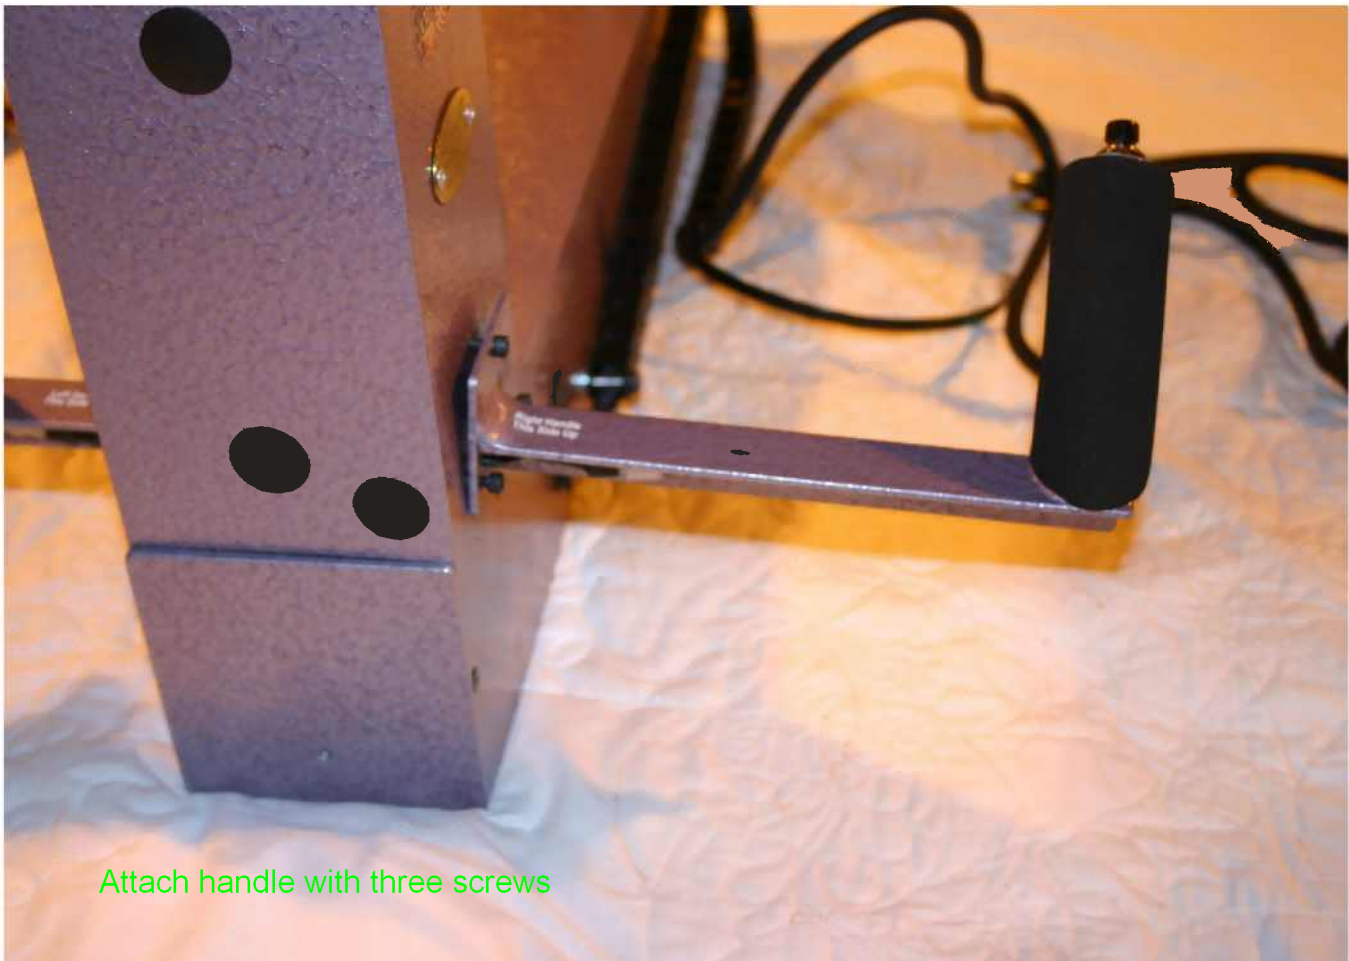

Attach handle with three screws

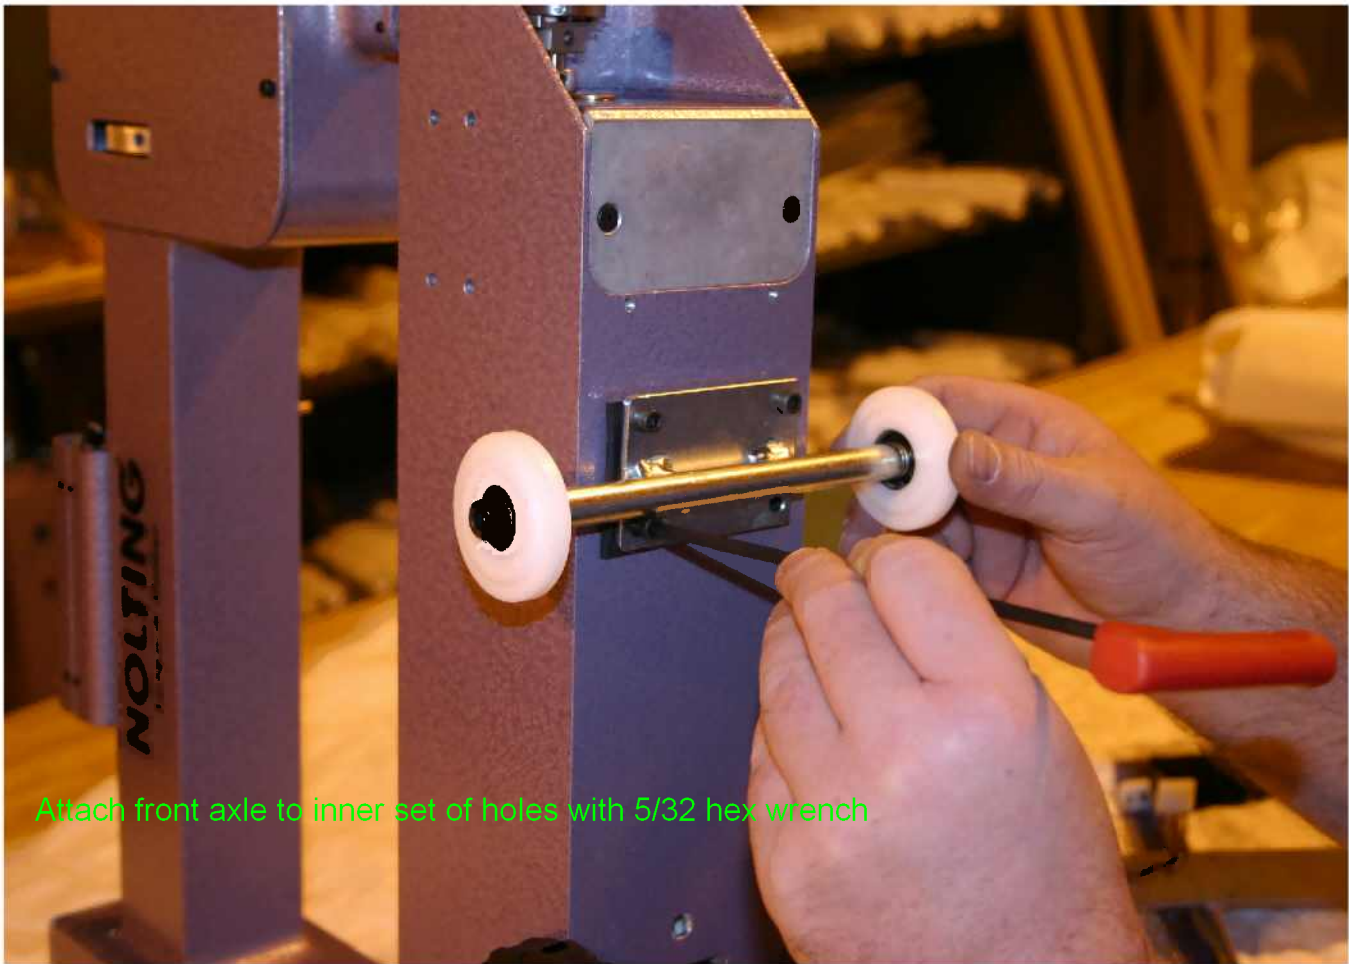

Attach front axle to inner set of holes with 5/32 hex wrench

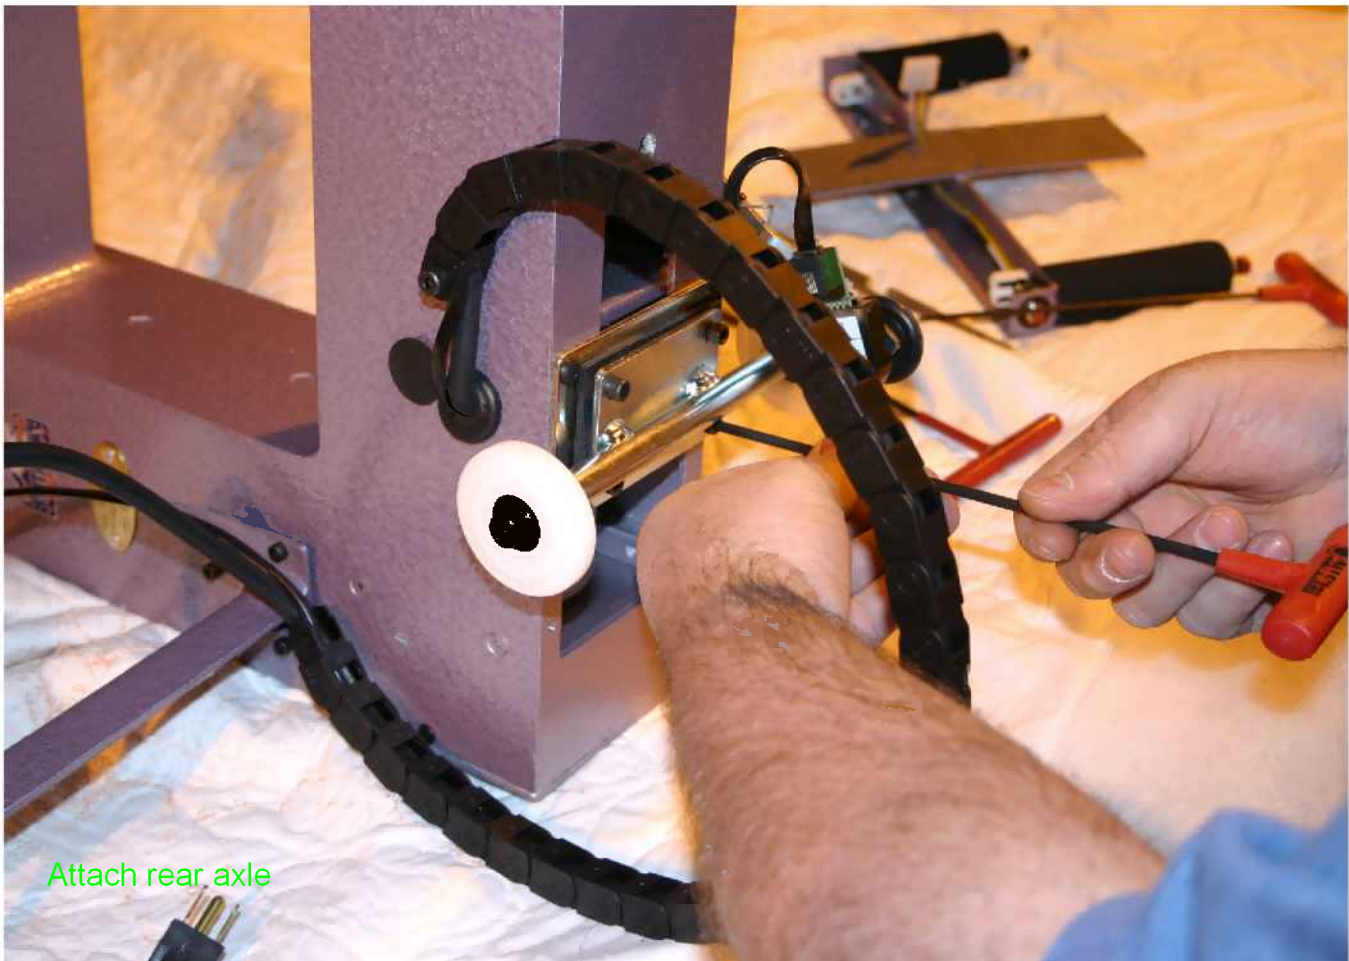

Attach rear axle